

# Vegetative Roofs

**FOAM-CONTROL  
GEOFOAM**™

## A lightweight, easy to install insulation and fill material for Vegetative Roofs.

Foam-Control® Geofoam is a cost effective, durable, time saving, and light weight insulation and fill solution for vegetative roof designs. Vegetative roofs add weight for soil/growing medium, planters, pavers, plantings, etc. on the structural roof deck. Foam-Control Geofoam reduces weight resulting in a more economical structural roof deck and provides insulation that results in energy savings.


- Super lightweight compared to other fills
- Allows for mixing intensive and extensive designs
- Easy fabrication for landscaping contours
- Provides insulation performance

## Compressive Resistance/R-value.

<b>FOAM-CONTROL GEOFOAM</b> ™	<b>Compressive Resistance @ 1% deformation</b>	<b>R-value/inch @ 75°F</b>
<b>12</b>	2.2 psi 320 psf (15 kPa)	3.1 °F·ft <sup>2</sup> ·h/Btu (0.55 °K·m <sup>2</sup> /W)
<b>15</b>	3.6 psi 520 psf (25 kPa)	3.6 °F·ft <sup>2</sup> ·h/Btu (0.63 °K·m <sup>2</sup> /W)
<b>19</b>	5.8 psi 840 psf (40 kPa)	3.8 °F·ft <sup>2</sup> ·h/Btu (0.67 °K·m <sup>2</sup> /W)
<b>22</b>	7.3 psi 1050 psf (50 kPa)	4.0 °F·ft <sup>2</sup> ·h/Btu (0.70 °K·m <sup>2</sup> /W)
<b>29</b>	10.9 psi 1570 psf (75 kPa)	4.2 °F·ft <sup>2</sup> ·h/Btu (0.70 °K·m <sup>2</sup> /W)
<b>39</b>	15.0 psi 2160 psf (103 kPa)	4.2 °F·ft <sup>2</sup> ·h/Btu (0.74 °K·m <sup>2</sup> /W)
<b>46</b>	18.6 psi 2680 psf (128 kPa)	4.3 °F·ft <sup>2</sup> ·h/Btu (0.76 °K·m <sup>2</sup> /W)

## Sizes and Shapes.

Foam-Control Geofoam can be made in large or small, thick or thin sections. It can be custom cut in sizes ranging from a few square inches up to 3' x 4' x 16'. Shop drawings for custom projects are easily produced on computer aided cutting equipment.

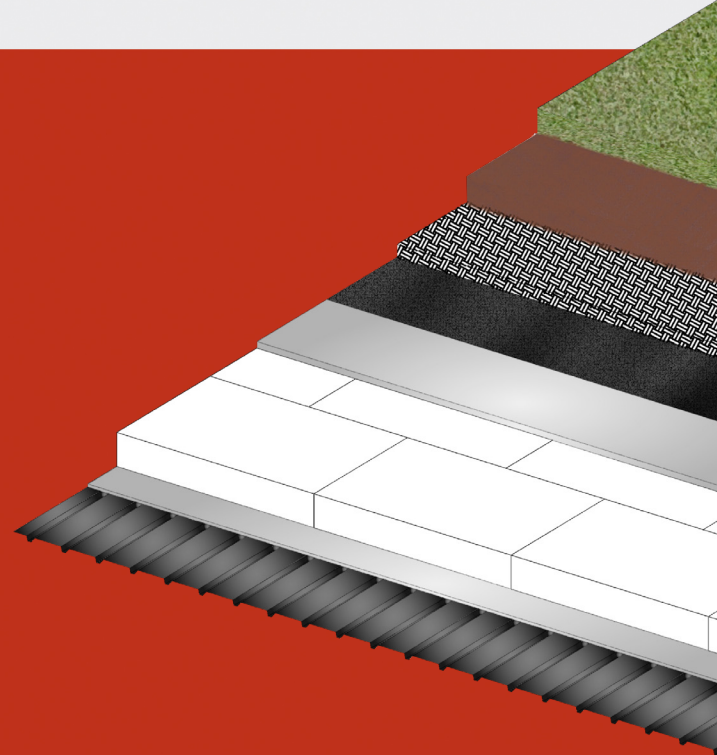

## FOAM FACE-OFF: Choosing Foam-Control geofoam over other insula- tion and fill materials for vegetative roof designs

- Geofoam can easily vary strength, thickness, and size
- Geofoam arrives ready to place in all weather conditions
- Geofoam is the best value lightweight and insulation fill material
- Geofoam blocks add very little weight to the roof deck
- Geofoam can be fabricated to create more landscape design possibilities

## Proven to meet, or exceed, building codes.

Foam-Control Geofoam is manufactured under an industry leading quality control program monitored by UL and further recognized in UL Evaluation Report UL ER11812-01. Foam-Control meets ASTM D6817, "Standard Specification for Rigid, Cellular Polystyrene Geofoam."



## Ready to take control? Start here.

If you're ready to have Foam-Control contribute to your next project, just contact your nearest Foam-Control manufacturer and Technical Sales Representative. They will be happy to give you design consultation, information about Foam-Control products, pricing, and answers to all of your questions.



## MOLDED PRODUCTS

A Division of Atlas Roofing Corporation

*For further information contact us:*

*Phone: (800) 277-0967*

*[www.atlasfoamcontrol.com](http://www.atlasfoamcontrol.com)*



Foam-Control products are manufactured by AFM Corporation licensees.

Copyright © 2019 AFM Corporation. All rights reserved. Printed in USA. Foam-Control is a registered trademark of AFM Corporation, Lakeville, MN. The Foam-Control Geofoam logo and The Trusted Lightweight Fill Material are trademarks of AFM Corporation, Lakeville, MN.

UL logo is a registered trademark of UL LLC.

GF09-01/19



[www.geofoam.com](http://www.geofoam.com)

**THE TRUSTED  
LIGHTWEIGHT  
FILL MATERIAL™**